

Ciifrol Formula SF SAE 20W 40

High Performance Passenger Car Motor Oil – API SF

Ciifrol Formula SF SAE 20W-40 is high performance petrol engine oil for new generation petrol vehicles. These oils are blended from high viscosity index base stocks and contain additives to meet the stated performance standards


Performance Standards:

SPECIFICATIONS	SAE VISCOSITY GRADE
	SAE 20W 40
API SF / CD	✓
MIL-L-46152 D	✓
IS 13656 : 1993 Type EPL3 / DL2	✓

Key Performance Features and Benefits :

- Excellent sludge control and extra wear protection at high temperatures and severe Operating conditions.
- Superior performance in terms of oxidation stability, dispersancy characteristics and energy efficiency.
- Outstanding overall engine cleanliness and also provide long engine life.
- Fuel savings and low oil top up.
- Catalytic Converter Compatible

Applications:

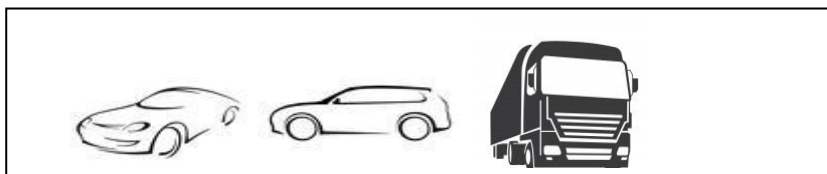

- **Passenger Cars**
Ideally suitable for new generation imported and Indian passenger cars running on petrol requiring API SF specification and SAE 20W-40 viscometrics
- **Light Duty Diesel Vehicles**
These Oils are also suitable for use in light duty vans and trucks running on diesel

SPECIFICATON			
FORMULA SF SAE 20W 40			
S.NO.	CHARACTERISTICS	ASTM	Control Limit
1.	Appearance		Clear & Bright
2.	Sp. Density at 29.5° C	D-1298	To Report
3.	Colour	D-1500	Natural/Red
4.	K. Viscosity @ 40° C	D-445	To report
5.	K. Viscosity @ 100° C	D-445	13.5-15.5
6.	Viscosity Index	D-2270	130 min
7.	Flash Point COC	D-92	200 min
8.	Pour Point	D-97	-24 max
9.	TBN	D-2896	5.5-7.5

Disclaimer:

The above given values are typical results; however the guaranteed specifications values are different and often lower than the typical values. For the guaranteed specifications, please discuss with Ciif Lubricants representative or visit our website www.ciifrol.com.



SILVASSA PLANT : Plot No. 18, Survey No. 61/2P,
Village Masat, Silvassa-396230
Tel: 0260-2680008
Website: www.ciifrol.com,
E-Mail:- customersupport@ciifrol.com

