

Ciifrol Formula SG SAE 20W 50

High Performance Passenger Car Motor Oil – API SG

Ciifrol Formula SG SAE 20W-50 is high performance petrol engine oil for new generation petrol vehicles. These oils are blended from high viscosity index base stocks and contain additives to meet the stated performance standards


Performance Standards:

SPECIFICATIONS	SAE VISCOSITY GRADE
	SAE 20W 50
API SG / CD	✓
MIL-L-46152 D	✓
IS 13656 : 1993 Type EPL3 / DL2	✓

Key Performance Features and Benefits :

- Superior performance in terms of oxidation stability, dispersancy characteristics and energy efficiency.
- Excellent sludge control and extra wear protection at high temperatures and severe Operating conditions.
- Outstanding overall engine cleanliness and also provide long engine life.
- Fuel savings and low oil top up.
- Catalytic Convertor Compatible

Applications:

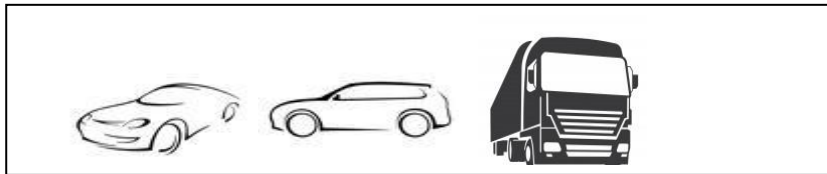

- **Passenger Cars**

Ideally suitable for new generation imported and Indian passenger cars running on petrol requiring API SG specification and SAE 20W-50 viscometrics

- **Light Duty Diesel Vehicles**

These Oils are also suitable for use in light duty vans and trucks running on diesel

SPECIFICATON			
FORMULA SG SAE 20W 50			
S.NO.	CHARACTERISTICS	ASTM	Control Limit
1.	Appearance	Visual	Clear & Bright
2.	Sp. Density at 29.5° C	D-1298	To Report
3.	Colour	D-1500	Natural/Red
4.	K. Viscosity @ 40° C	D-445	To report
5.	K. Viscosity @ 100° C	D-445	17.5-19.5
6.	Viscosity Index	D-2270	120 min
7.	Flash Point COC	D-92	220 min
8.	Pour Point	D-97	-21 max
9.	TBN	D-2896	5.5-7.5

Disclaimer:

The above given values are typical results; however the guaranteed specifications values are different and often lower than the typical values. For the guaranteed specifications, please discuss with Ciif Lubricants representative or visit our website www.ciifrol.com.



SILVASSA PLANT : Plot No. 18, Survey No. 61/2P,
Village Masat, Silvassa-396230
Tel: 0260-2680008
Website: www.ciifrol.com,
E-Mail:- customersupport@ciifrol.com

